
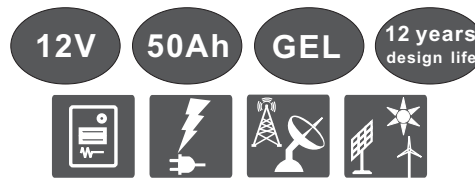


## HXG DEEP CYCLE GEL VRLA BATTERY

HXG Series, with its proprietary grid alloy and paste formulation, provides superior performance in both high cycling and floating applications. By combining the newly developed Nano Gel electrolyte with high density paste, the HXG series offers high recharge efficiency at very low charge current. The acid stratification is highly reduced by adding Nano Gel. It is suitable for off-grid photovoltaic, wind or hydro power application.

### BATTERY DIMENSIONS

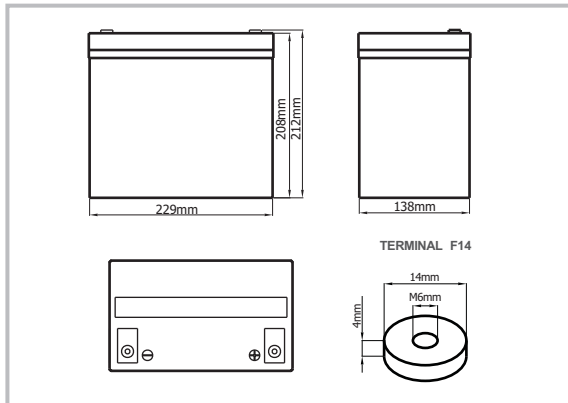

### TECHNICAL SPECIFICATIONS

Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (20°C)	12 Years
Nominal Capacity (20°C)	50 Ah @ 10HR-rate (to 1.80Vpc)
Dimension (mm)	L229mm x W138mm x H212mm
Approx. Weight	16.0 kg (35.3 lbs)
Terminal Type	Female Copper Insert M6 (torque:6~7N.m)
Internal Resistance	Approx. 0.0062 Ohm (fully charged @ 20°C)
Max. Charge Current	12.5A
Max. Discharge Current (5S)	500 A
Short Circuit Current	1930 A
Self Discharge	Approx. 3% per month @ 20°C
Ambient Temperature	Discharge: -15~50°C Charge: -15~40°C Storage: -15~40°C
Float Charge Voltage (20~25°C)	13.6-13.8V (-3mV/ cell/ °C)
Equalize and cycle Use Charge Voltage (20~25°C)	14.4-14.8V (-5mV/ cell / °C)
Container Material	ABS (UL94-V0 optional)









### BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)												
F.V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	150	111	91.4	56.3	33.8	19.6	14.2	11.3	9.41	6.43	5.30	2.86
1.67V	134	102	86.1	53.8	32.9	19.3	14.0	11.1	9.28	6.34	5.24	2.79
1.70V	119	92.7	81.4	51.8	32.1	19.0	13.8	11.0	9.21	6.26	5.17	2.73
1.75V	104	86.1	75.5	50.0	31.5	18.7	13.6	10.9	9.09	6.18	5.10	2.68
1.80V	91.8	78.3	70.5	47.8	30.5	18.3	13.4	10.7	8.87	6.03	5.00	2.62
1.85V	78.6	70.5	64.2	45.1	29.1	17.6	12.9	10.4	8.66	5.90	4.87	2.56

Constant Power Discharge Characteristics: W/cell (25°C)												
F.V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	264	199	167	104	63.0	36.9	26.7	21.4	17.9	12.3	10.3	5.54
1.67V	239	185	158	100	61.7	36.4	26.6	21.3	17.8	12.2	10.2	5.45
1.70V	216	170	151	97.0	60.7	36.2	26.5	21.2	17.7	12.1	10.1	5.37
1.75V	190	160	142	94.4	59.9	35.9	26.3	21.1	17.6	12.0	10.0	5.30
1.80V	170	147	133	91.1	58.5	35.5	26.0	20.8	17.4	11.9	9.93	5.24
1.85V	148	134	123	86.8	56.5	34.4	25.4	20.4	17.1	11.8	9.73	5.15

## CHARACTERISTICS

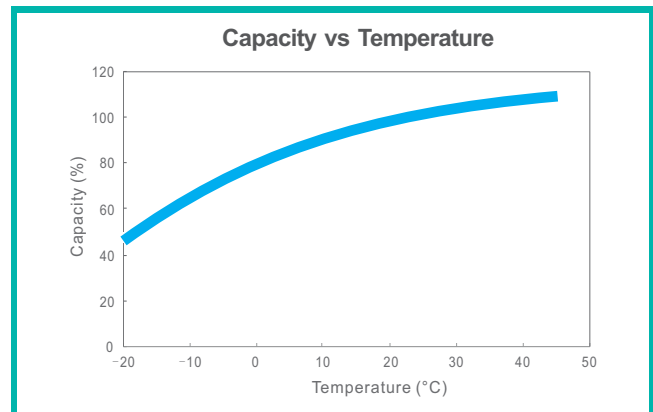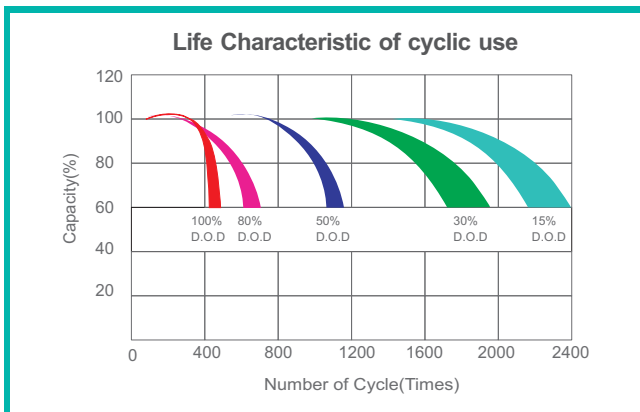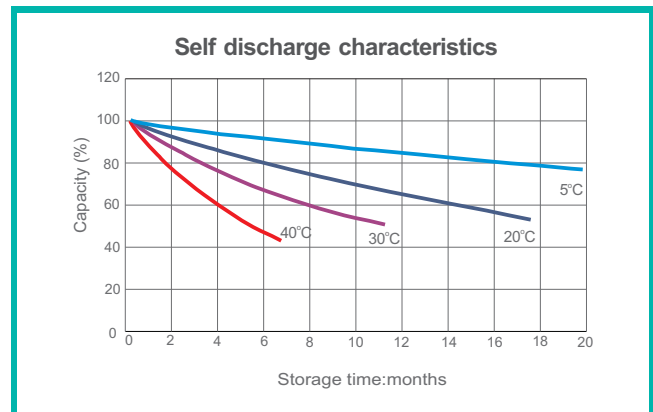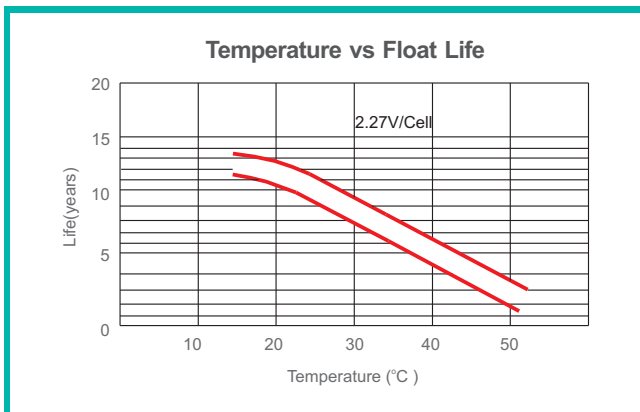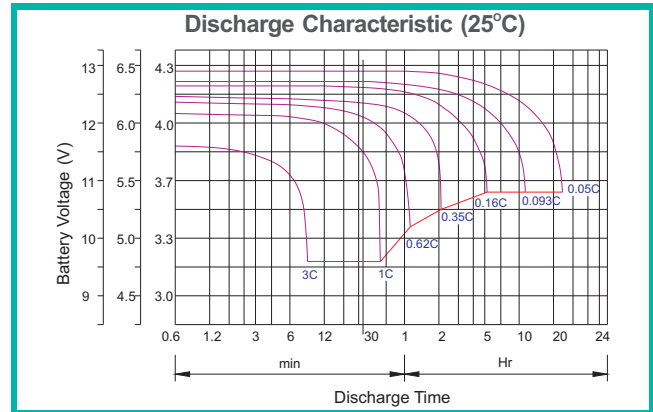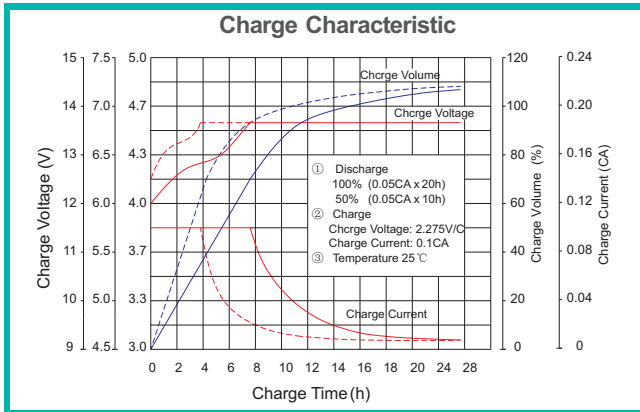

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.80V	1.75V	1.70V	1.60V
Discharge Current I /A	I < 0.2C	0.2C ≤ I < 0.6C	0.6C ≤ I < 1.0C	I ≥ 1.0C

**Charge the batteries at least once every six months, if they are stored at 25°C.**

### Charging Method:

Constant Voltage	0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.25CA
Constant Current	0.2Cx2h+0.1CAx12h
Fast	0.2Cx2h+0.3CAx4.0h

### Maintenance & Cautions

<b>Cycle service</b>
※ Avoid battery over discharge, especially battery series connection use.
※ Charged with recommend voltage, ensure battery can be full recharged.
In general, recharge capacity should be 1.1-1.15 times discharge capacity.
※ Effect of temperature on cycle charge voltage: -5mV/ °C/Cell.
※ There are a number of factors that will affect the length of cyclic service.
The most significant are depth of discharge, ambient temperature, discharge rate, and the battery recharge mode.
Generally speaking, the most important factors is depth of discharge.